


**QAI LISTING B1087-1**  
**METL-SPAN CLEANSEAM™ INTERIOR WALL & CEILING PANELS**  
 (CF INSULATED METAL PANELS WITH FIBER REINFORCED PLASTIC (FRP) INTERIOR FINISH)  
**NFPA 286 / CLASS A FINISH ASSEMBLY**

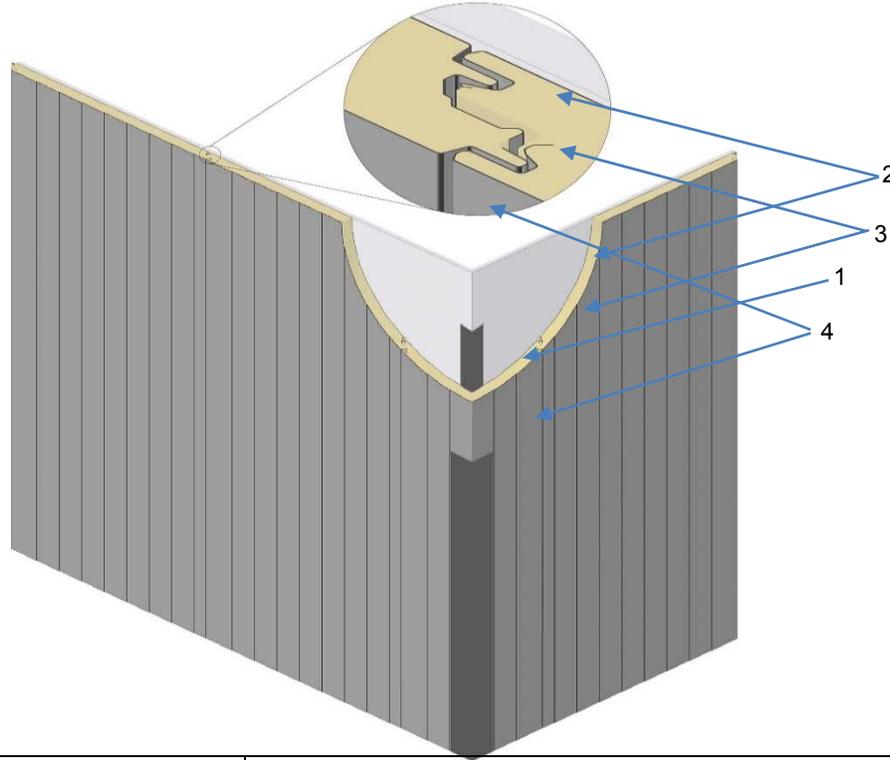

No.	COMPONENT	DESCRIPTION
1	Interior Finish	Class A Fiber Reinforced Plastic panel of Flame Spread Index of 25 or less, and Smoke Developed Index of 450 or less. Metl-Span CleanSeam™ Joint Weld/Seam used to connect adjacent interior finish panels. When used as an interior partition panel, the FRP finish may be applied to both sides of the CleanSeam™ panel.
2, 4	Insulated Metal Panel Face	Minimum 26 Gauge Steel Face, available from Metl-Span in various colors and textures.
3	Foam Plastic Core	Metl-Span foam plastic core of nominal density 2.5 lbs/ft <sup>3</sup> (40 kg/m <sup>3</sup> ) and maximum thickness of 6 inches (150 mm).

\*The above assembly has been evaluated and found compliant for use as Class A interior finish as outlined in the International Building Code Section 803.1.1 Interior Wall and Ceiling Finish Materials (or Section 803.1 on some code editions), and complies with Section 803.12 Stability (or Section 803.3 on some code editions).

\*The above assembly has been evaluated and found compliant for use as interior walls and ceilings in single story buildings of Type I, II, III, and IV construction per Chapter 26 of the International Building Code for use without a code prescribed thermal barrier per testing in accordance with Section 2603.9 Special Approval (or Section 2306.10 on some code editions).

\*This assembly is not evaluated for fire-resistance rated wall applications.